


ROTARY

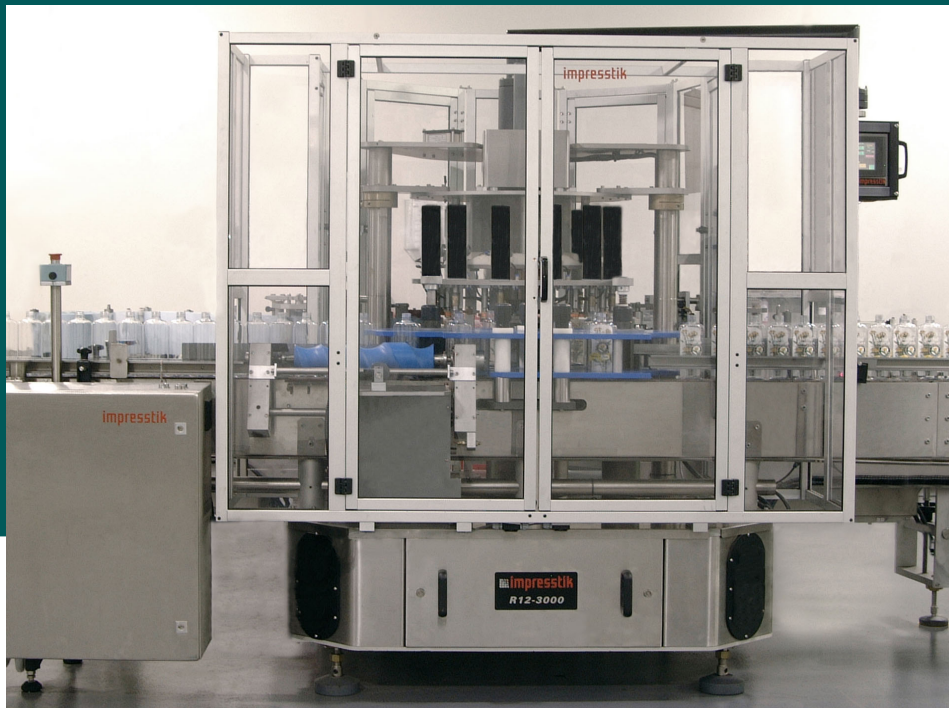

ROTARY FULLY AUTOMATIC PRESSURE-SENSITIVE LABELLER - suitable for high speed & difficult product labelling

FEATURES

- Designed and manufactured in Australia
- Can be integrated into any production line
- Labels supplied from up to six webs; front, back, neck, shoulder, medallion or fully wrap labels
- Interchange labelling stations available providing seamless production with efficiencies as high as 96%
- Output rates of up to 550 products per minute
- PLC controlled with touch screen / operator interface / memory recall
- Label placement accuracy (±) 1mm
- Fast changeovers with calibrated set points & package set ups
- Quick connect / disconnect of change parts (Tooling)
- Optional product orientation, bottle inflation for soft wall product
- Safety guarding to Australian standards
- Stainless steel framework



TOUCH SCREEN

- The PLC is a fully integrated labelling head controller.
- Operator interface touch screen
- Able to multitask multiple labelling heads from the one unit
- Memory recall of electronic set points (Library)
- All electronic adjustments are made on the front panel
- Monochrome touch screens, (Colour optional)

STAR WHEEL ARC AND FEED SCREW ASSEMBLY

- Applies front, back, neck, fully wrap, shoulder and medallion labels
- Accurate label application
- Label control fully synchronised to production line
- Quick lock interchange for tooling
- Widely used in the food, cosmetics and especially the wine industry
- Output rate up to 550 bottles per minute pending on model
- Custom designs available



LABELLING HEAD ROTARY

- PLC Controlled
- AC Servo with positioning
- 180mm web drive (Optional 90-120-150-220)
- Label placement (± 1 mm)
- Applicator support with two directional slides
- End of reel scanner
- Motorised waste rewind / unwind (Optional)
- Infrared label gap scanner / capacitive optional
- Reel dia $\varnothing 340$ mm standard (Optional $\varnothing 380 + \varnothing 440$)

FEED SCREW ASSEMBLY

- Positive product handling
- Made to suit individual product sizes and shapes if required
- Easy connect/disconnect for quick changeover
- Colours available for product/tool identification
- Safety trip out for fallen bottle

CONVEYOR MODULE

- Made to suit clients specifications

SAFETY

All machines are designed to Australian standards. The Rotary style labellers are equipped with a combination of mechanical and floor lazer guarding integrated into a standard safety circuit.

LAYOUT SPECIFICATIONS

Available in left or right hand execution.

POWER REQUIREMENTS

3 Phase 415V 20 Amps

